

Flex-Rite™



RDC

"Discharge"

...higher pressure capability with less weight!

RDC, a **lightweight** discharge hose provides extra flexibility and smooth handling. (Meets 3-A* standards, USDA requirements and is FDA compliant). Designed to be chemically resistant to mild caustic solutions. This discharge hose is well suited for **overhead CIP** wash units and capable of handling pressures up to 250 PSI.

MODEL	I.D.	O.D.	WORKING PRESSURE	MIN. BEND RADIUS	WEIGHT PER FT.	VAC. IN HG.	LENGTH
RDC150	1 1/2"	2.07"	250 PSI	-	.98 lbs.	-	100'
RDC200	2"	2.59"	250 PSI	-	1.38 lbs.	-	100'
RDC250	2 1/2"	3.11"	250 PSI	-	1.78 lbs.	-	100'

TUBE White, FDA, 3-A*, Chlorobutyl
REINFORCEMENT Spiral-plied synthetic fabric
RECOMMENDED CLEANING CIP, COP


COVER Blue EPDM w/white stripe
TEMP. RANGE -40 to 225° F

Features:

- Light Weight
- Higher Pressures
- Non Wire/Non Metallic

Applications:

- Pump Discharge
- CIP Supply to Spray Nozzles
- Spray Ball
- Vertical Applications
- Overhead Applications
- Drain Lines
- Metal Detection Systems

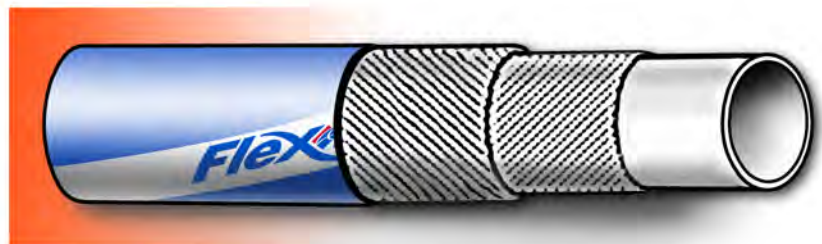

ALL R-Series hose products meet/comply: USDA Class III requirements, FDA CFR Title 21.1772600, 3-A 18-03

*The 3-A 62-02, standard applies only to assemblies of 3/4" diameter and larger.

WARNING Working pressure ratings for all Flex-Rite™ brand hoses are based on 70° F (ambient temperature). Working pressure and vacuum ratings will decrease as temperatures increase. For "R" series applications that exceed 200° F contact manufacturer for suggestions.



513-889-2118 • 885-357-4110 • 513-889-2125 FAX

5452 Spellmire Dr, Cincinnati, OH 45246

www.acesanitary.com

ASRDC817