


Table						
PART NO.	A	B	BW OD	BW ID	OAL	THREAD
15W-1	1.463	.562	1.250	.870	1.500	1.462-8 ACME
15W-1.5	1.985	.562	1.750	1.370	1.625	1.994-8 ACME
15W-2	2.516	.594	2.313	1.870	1.750	2.526-8 ACME
15W-2.5	3.048	.719	2.875	2.370	1.750	3.058-8 ACME
15W-3	3.579	.750	3.375	2.870	1.812	3.590-8 ACME
15W-4	4.683	.875	3.834	3.834	2.125	4.695-6 ACME

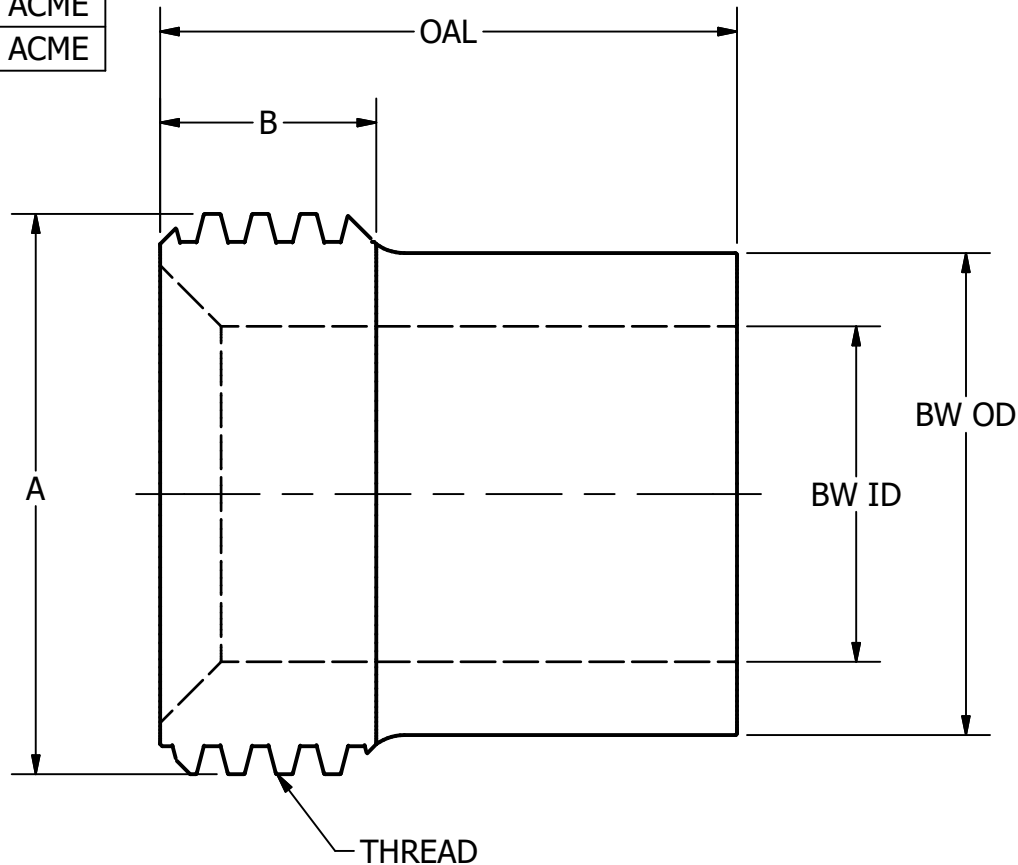

TOLERANCES	DRAWN M. BOUDREAU 4/16/2025	Steel & O'Brien Mfg. Inc.	
	DECIMALS: .XX ±.015 .XXX ±.005 .XXXX ±.0005 ANGLES: 1°	TITLE ACME 15W THREADED FERRULE	
ALL EDGES AND FILLET .015 R UNLESS OTHERWISE SPECIFIED	DWG NO: 15W		REV
	SCALE: NONE		SHEET 1 OF 1